

DECLARATION OF PERFORMANCE

Strength graded structural timber

Construction product

Strength graded structural timber which has been planed by the producer below and fulfills the requirements according to EN 14081-1:2005+A1:2011. For further or more detailed information on the delivered product, in addition to what is given below, see information on the packaging or in possible accompanying commercial document.

Intended use of the construction product

For load-bearing purposes in construction works designed according to Eurocode 5 (EN 1995) and for other uses where the strength and stiffness of the structure is essential.

Producer

Company: Valbo Trä AB
Address: Box 1023
SE-818 21 VALBO
Sweden
Telephone: +46 26-662880
E-mail: info@valbotra.se
Web site: www.valbotra.se

System of assessment and verification of constancy of performance of the construction product

System 2+.

Certification

The notified body SP Technical Research Institute of Sweden (identification number 0402) has performed an initial inspection of the manufacturing plant and of the factory production control and performs continuous surveillance, assessment and evaluation of our factory production control. SP has issued EC Certificate of Factory Production Control No. 0402 – CPD – 1718-12.

Declared performance

Performance for strength graded structural timber in conformity with the harmonized European standard EN 14081-1:2005+A1:2011 Timber structures – Strength graded structural timber with rectangular cross section – Part 1: General requirements.

Essential characteristics

Declared performance

Species/species group	WPPA: spruce (<i>Picea abies</i>) and pine (<i>Pinus sylvestris</i>)
Growth area	NNE Europe (Northern and North Eastern Europe)
Surface finish	Planed
Dry or wet graded	Dry graded
Durability	4 (according to EN 350-2)
Reaction to fire	D-s2, d0 (according to EN 14081-1, Table C.1)
Release of dangerous substances	No dangerous substance to be declared

Machine strength graded:

Range of thickness (fire resistance)	31 – 110 mm
Range of width (fire resistance)	60 - 300 mm
Grading machines	Dynagrade / Rosgrade / Viscan
Strength, stiffness and density	According to EN 338: C35, C30, C24, C18 or C16; According to EN 14081-1:2005/A1:2011


Visually strength graded:

Range of thickness (fire resistance)	25 -100 mm
Range of width (fire resistance)	50 -300 mm
Grade/grading standard	SS 230120
Strength, stiffness and density	According to EN 338: C30, C24, C18 or C14

That the performance for our construction product strength graded structural timber is in accordance with the declared performance given above is certified:

Valbo 2015 06-01

Valbo Trä AB

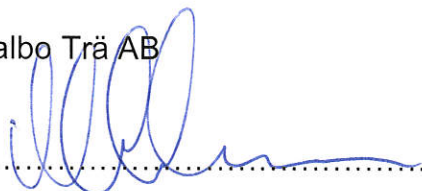

.....

Mats Andersson, VD